

Lacing Twine

Waxed Nylon Lacing

Hellermann Flat Braided Waxed Nylon Lacing is available in two sizes. Being impregnated with wax, the lacing grips the cables as they are being laced and does not loosen if the tension is reduced. Conforms to MIL - T -43435, type 1, finish B and is suitable for use up to 150°C.

Technical Table

Code	Standard Reel Length (m)	Width nominal (mm)	Thickness* nominal (mm)	Breaking Load minimum (kg)
MW/062	460	1,5	0,3	13,6
MW/090	460	2,3	0,3	22,7

*Measured under 0,45 kg tension.

LOH Lacing

A low cost version of the MW waxed nylon lacing is the LOH Series which is available in only one colour (cream).

PVC Covered Nylon Lacing Cord

PVC Covered Nylon Filled Lacing Cord, ref PNF, is a high grade tubular nylon core covered with a flexible PVC coating. Suitable for use up to 85°C.

Colour: Black only.

Hellermann Clips

A full range of saddles to fit all main contracting domestic cables sizes. From 3,5 to 12 mm round and flat 4 mm to 12 mm and are available in white, cream, brown and black.

Technical Table

Code	Style	Cable Size	Pin Dimensions Lx Dia. (mm)		Quantity per box
HT350	Round	3,5	15	1,0	100
HT400	Round	4,0	20	1,5	100
HT500	Round	5,0	20	1,5	100
HT600	Round	6,0	20	1,5	100
HT700	Round	7,0	20	1,5	100
HT800	Round	8,0	29	2,0	100
HT900	Round	9,0	29	2,0	100
HT1000	Round	10,0	29	2,0	100
HT1100	Round	11,0	29	2,0	100
HT1200	Round	12,0	29	2,0	100
HT40	Flat	4,0	15	1,0	100
HT50	Flat	5,0	15	1,5	100
HT90	Flat	9,0	29	2,0	100
HT100	Flat	10,0	29	2,0	100
HT120	Flat	12,0	29	2,0	100



Waxed Nylon Lacing




LOH Lacing

Technical Table

Code	Length (m)	Diameter (mm)
LOH 1	1000	1,7
LOH 2	1000	2,0

Technical Table

Code	Nominal Diameter (mm)	Colour	Standard Reel Lengths (m)
PNF 1012	1,1	Black	760

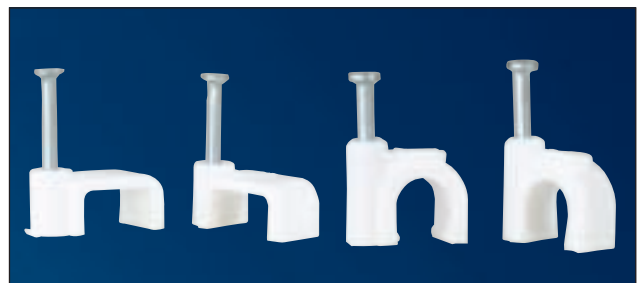

Cable Clips