


Utility Junction Box

Features

- Manufactured from high impact, corrosion and UV resistant material
- For use in general and industrial installations
- SABS 1222 IP66/68. (Dust and water tight)
- Allows for 1, 2, 3 and 4 way connections
- Blanking plugs, O-rings and lock nuts provided
- No need for drilling and tapping
- Internal earth plate provided (no exposed metal parts)
- Din rail mounting studs provided
- UJB1/2T - Special locking key to prevent unauthorised entry (optional)
- UBJ1/2C - UJB1 with clear lid

Certifications

- SABS 1222 IP66/68
- IEC529
- UJB1EX / UJB2EX - IEC 60529, SANS 60529, SANS 60079 - 0/7, SANS 60079 - 15, SANS 61241-1-1, IP66/68, IP68 (2 m cont), Ex e II T6, Ex Na II T6, DIP B21 Tb T6

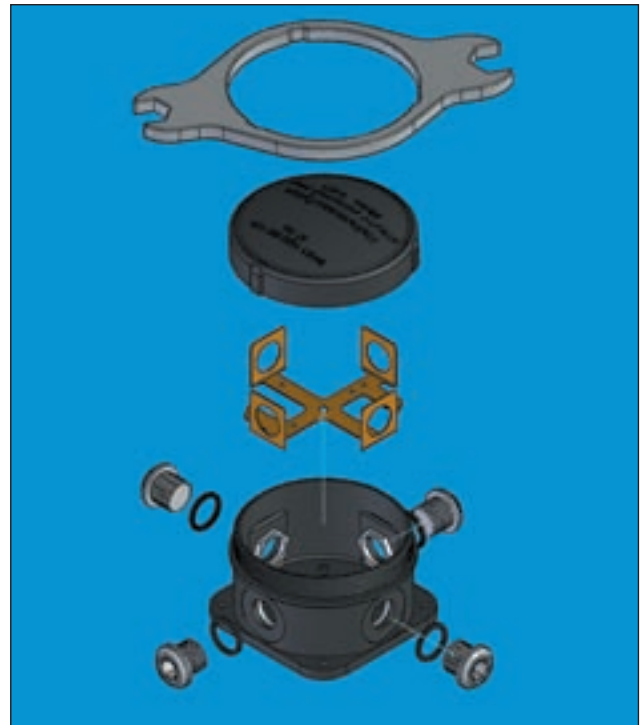

Selection Chart

Technical Table

Code	Dimensions (mm)							
	Total Width(A)	Outside Height(B)	Inside Height(C)	Gland Size(D)	Inside Width(E)	Fixing Hole		
						(F)	(G)	(H)
UJB1	109	75	57	M20	94	122	96	6.9
UJB2	135	85.5	59.5	M25	124	150	106	7
UJB1EX	109	75	57	M20	94	122	96	6.9
UJB2EX	135	85.5	59.5	M25	124	150	106	7

