

Commercial Grade Polyolefin

Is ideal for providing insulation of electrical connections, terminals, components and wiring systems. It requires a minimum shrink temperature of 120°C and is well suited to manual as well as automatic methods of application. Is very suitable for use as a continuous insulation sleeve in a variety of industrial applications.

Mini Reels

Technical Table

Code	Supplied Ø D	Recov. Ø (D)	Wall (WT) nom.	Qty per Box (m)
CP24R	2.4	1.2	0.5	20
CP32R	3.2	1.6	0.5	18
CP48R	4.8	2.4	0.5	16
CP64R	6.4	3.2	0.6	12
CP95R	9.5	4.8	0.6	10
CP127R	12.7	6.4	0.6	10
CP190R	19.0	9.5	0.8	5
CP254R	25.4	12.7	0.9	4

All dimensions in mm. Subject to technical changes.

Colours available: Black, Red, Blue, White, Yellow, Green/Yellow, Clear

Pre-Packs

Technical Table

Code	Supplied Ø D	Recov. Ø (D)	Wall (WT) nom.	Qty per Box (m)
CP24P	2.4	1.2	0.5	1
CP32P	3.2	1.6	0.5	1
CP48P	4.8	2.4	0.5	1
CP64P	6.4	3.2	0.6	1
CP95P	9.5	4.8	0.6	1
CP127P	12.7	6.4	0.6	1
CP190P	19.0	9.5	0.8	1
CP254P	25.4	12.7	0.9	1
CPPKITBK	2.4 - 4.8 x 10 each / 6.4 - 25.4 x 5 each - (Black)			
CPPKITCOL	2.4 - 12.7 x 5 each / 19.0 - 25.4 x 2 each - (Std Colours)			

All dimensions in mm. Except for quantity in metre (m).

Standard Colours: Black, Red, Blue, White, Yellow, Green/Yellow, Clear

(Clear is not Self Extinguishing)




CP Mini Reels.

Material Data

Type	Commercial Grade Polyolefin
Shrink Ratio	2:1
Longitudinal change after shrinkage	-5% max.
Minimum Shrink Temperature (Metric)	+120°C
Operating Temperature	-55°C to +135°C
Dielectric Strength (metric)	25kV/mm
Flammability	Flame retardant except for clear

RoHS

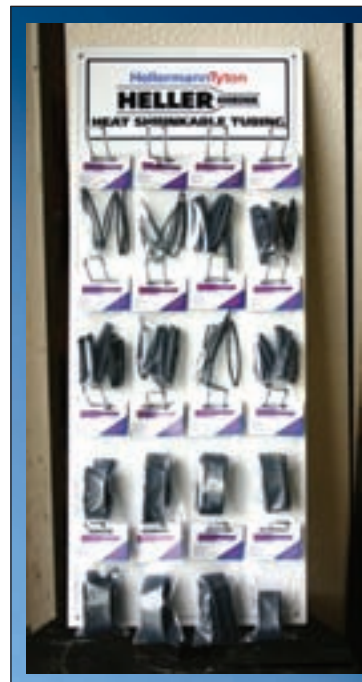

SHSTDP (1 m Pack)