

HellermannTyton

Renewable Energy: Balance of System Solutions

≥ 39
Countries


OVER
5



Years of
experience

ACREDITED
IATF
International
and local



1400 Tons 
Raw Material Converted

9



Production
Processes



700 Million 
Products Produced



6500
Stocked SKU's

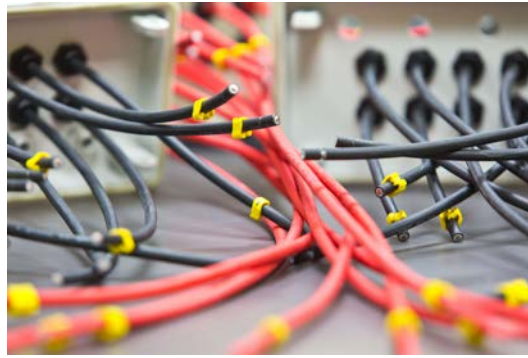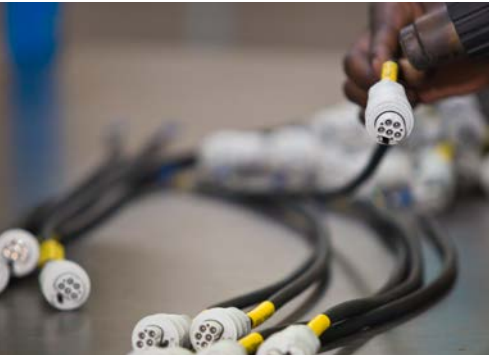

Interesting Facts



>420MW

Number of MW tracker control boxes supplied



>100Km

Km's of Motor cables



IATF

16949 2016



IEC61439-2

Type Tested



Local Manufacturing



1500V DC




Key Supplier Partnerships

NOTE: Some images and technical specifications may differ from what is included in this catalogue.



No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of HellermannTyton (Pty) Ltd.

© 2022-2023 – HellermannTyton (Pty) Ltd – All rights reserved


Solar Application Diagram	1-2
Custom Assemblies	
- String Combiner Boxes	3-4
- Wireless Master Receiver	4
- Fuses and Fuse Holders.....	5
Cable Ties and Fixings	
- Cable Ties: T-Series UV and Weather Resistant.....	6
- Cable Ties: MBT Stainless Steel	6
- Edge Clips: 2-Piece Fixing Ties for Edges – Top Fixing	7
- Heavy Duty Metal Clips	7
- Series 6 Ratchet P-Clamp Solar Hanger.....	8
- Cable Tie Tensioning Tools (Nylon and Stainless Steel).....	9
Patented Products	
- Rail Cradle for Cable Ties.....	9
Identification Systems	
- Thermal Transfer Printer - TT431.....	10
- Labels - TIPTAG PU	10
- PV Solar Labels.....	11-12
Cable Protection Systems	
- Convoluted Tubing.....	13
- PV Cables.....	13
Electrical Installations	
- PV Connectors	14
- Dust Covers.....	14
- Glands including Nylon.....	15-16
- Gland Accessories	17
- HTB Standard Lugs and Ferrules	17
Tools – Kits	
- Solar Backpack	18
- Electrical Tool Kit 1000V - 18 Piece	18
Tools – Crimpers, Cutters and Strippers	
- Hand Hydraulic Crimper and Kit	19
- PV Crimpers	19
- Hydraulic Cable Cutter	19
- PV Stripping Tool	19
Instruments – Photovoltaic	
- Selection Guide Instruments	20-21
- Solutions for Performance Optimization and Troubleshooting.....	21
- Selection Guide Accessories.....	22
- I-V Curve Tracer up to 1500V - DC: SOLARIV	23
- I-V Curve Tracer and Tester up to 1500V DC: IV500.....	24
- PV Insulation Tester: PVISOTEST	25
- Multifunction Device for Commissioning Tests: PVCHECK/PVCHECKPRO	26
Instruments	
- Thermal and Digital Clamp Meters	27
- Multimeter Clamp PV and Thermal Multimeters	28

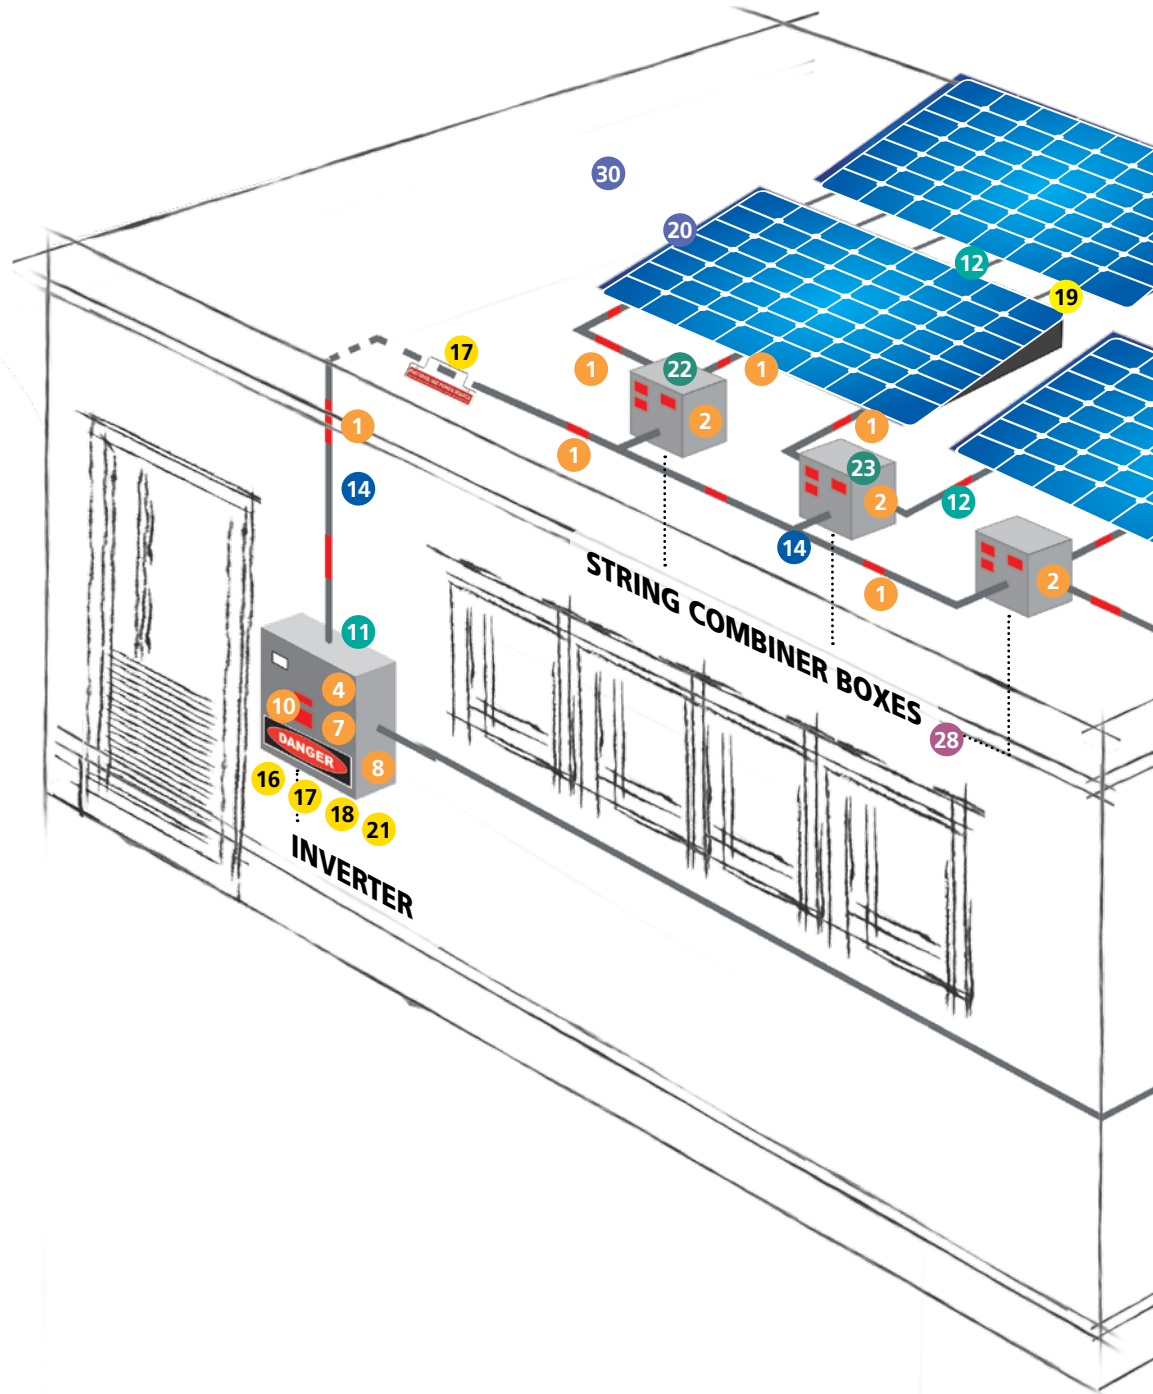




System Solutions


- 
28 String Combiner Box (p3-4)
- 
29 Cable Harnesses

Cable Ties and Fixings

- 
25 UV Weather Cable Ties (p6)
- 
26 Stainless Steel Cable Ties (p6)
- 
27 Edge Clips (p7)

Identification Systems

- 
1 Labels: TIPTAG (p10)
- 
2 - 10 Labels: Warnings (p11-12)
- 
Printer: TT431 Thermal Transfer (p10)

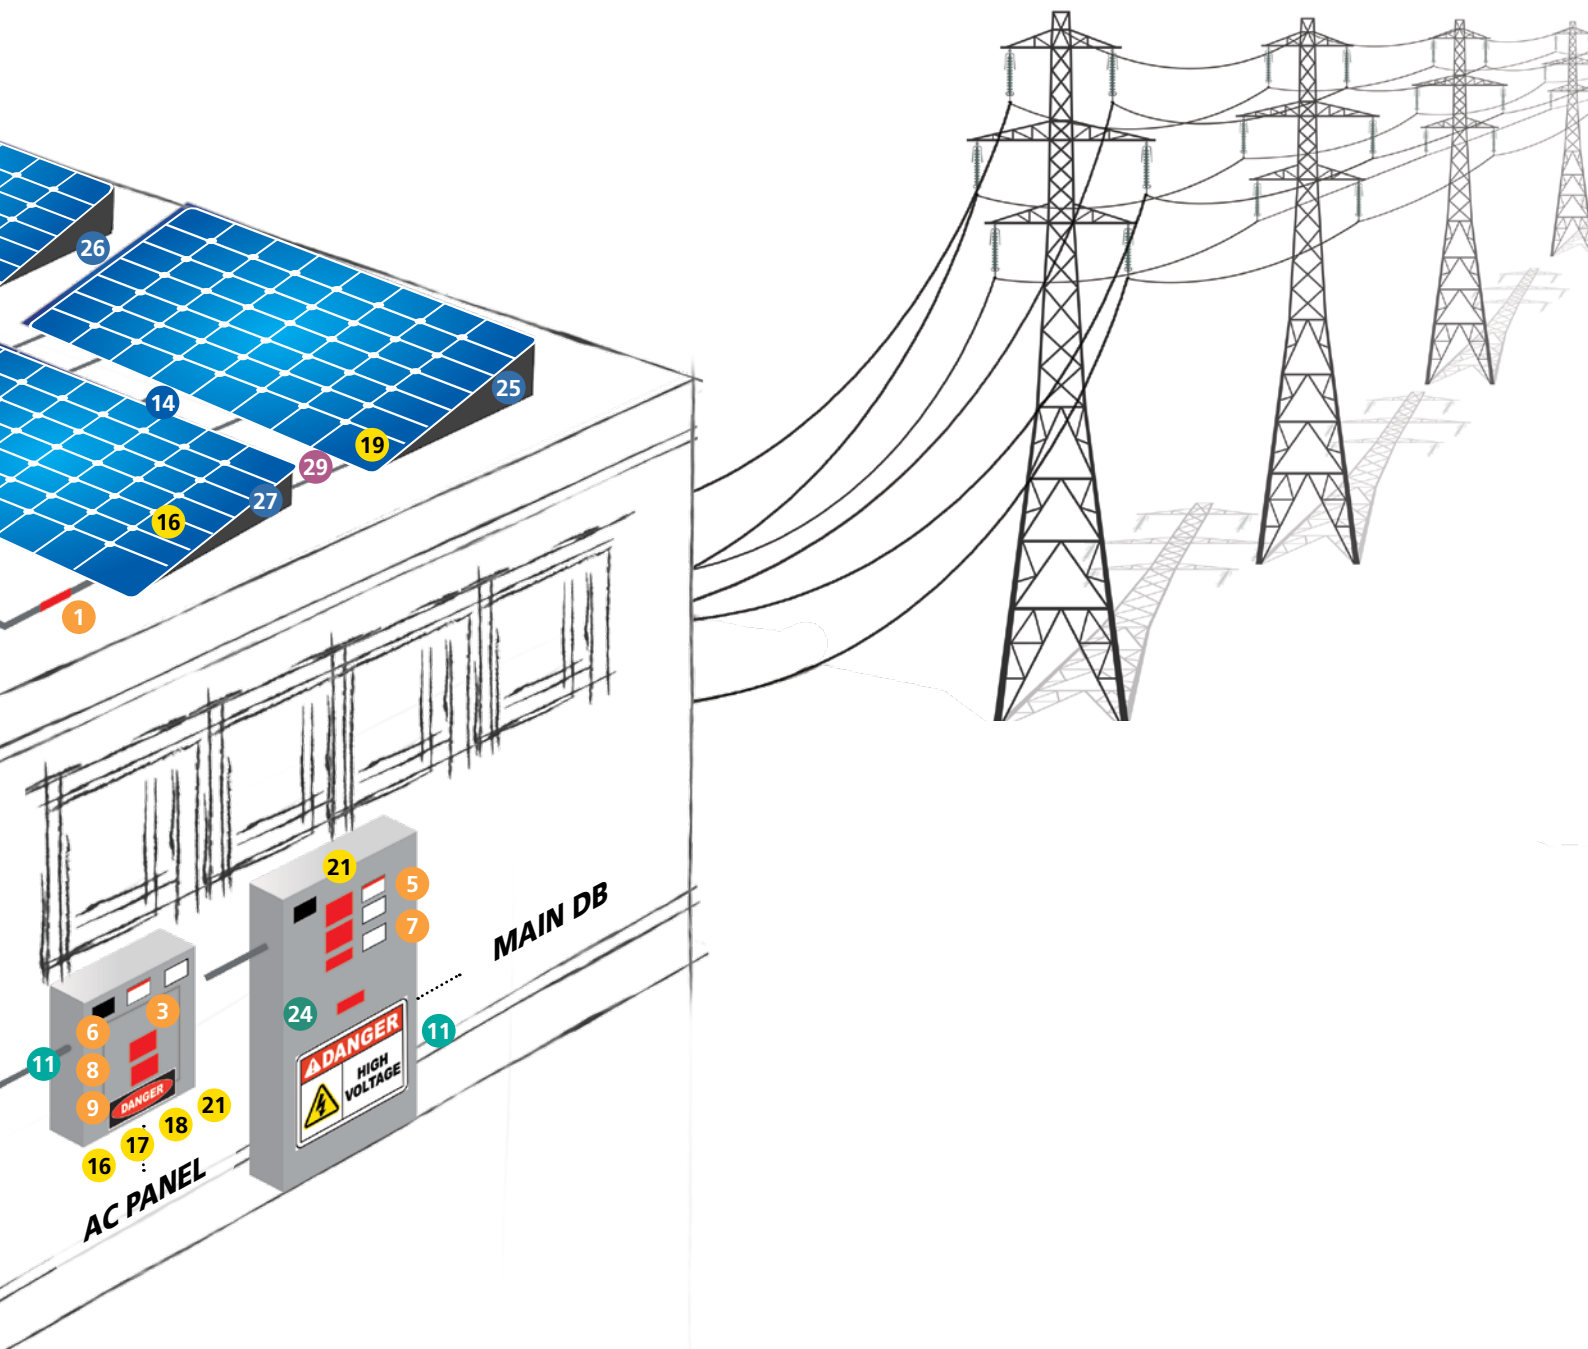




Cable Protection

-  **11** Nylon Glands (p16)
-  **12** Convolved Tubing (p13)
-  **13** Dust Covers, PV Connectors (p14)


Instruments

-  **16 - 17** SOLARIV, PVCHECK, IV500 (p23-26)
-  **19** Mercury (p28)
-  **21** PVIOTEST (p25)

Tools

-  **15** Hydraulic Crimper (p19)
-  **20** Solar Crimper (p19)
-  **30** Solar Backpack (p18)

For our full product basket, please refer to our website www.HellermannTyton.co.za

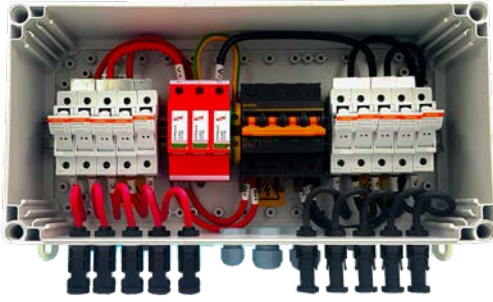

IP66
IP67

(Enclosure - Polycarbonate)

Small Installation String Combiner Boxes 1000V

- Standard design for easy installation


Technical Overview

Fuse Holders	32A/1000V DC
Fuses	15A/1000V DC
Surge Protection	Type 2/1200V DC
Isolator	63A/1000V DC
String Entry	PV connectors
Mains Exit	Compression glands



Locally designed and assembled

Type	No of Strings	Isolator	SPD	Certificates
SCB021ISOC	2	63A	Type 2	Test Certificate
SCB031ISOC	3	63A	Type 2	Test Certificate
SCB041ISO	4	63A	Type 2	Test Certificate
SCB051ISOC	5	63A	Type 2	Test Certificate

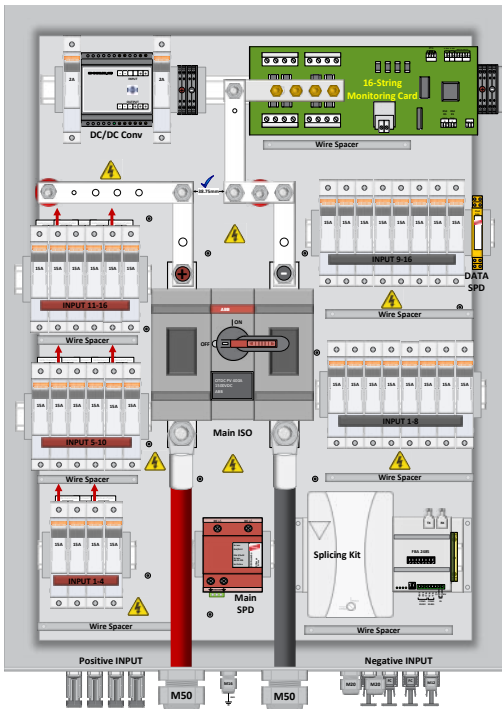

Communication
RS485 / Optical Fibre

OUT gland sizes based on
300mm² AA single cores
suitable for 27mm OD's

IP66
(Enclosure)

Custom Designed Combiner Boxes 1000V - 1500V


- Designed and assembled as per specification
- Type tested IEC61439-2

Technical Overview

Enclosure	GRP with hinged door – lockable options
Fuse Holder	32A/1500V DC
Fuses	20A/1500V DC
Main Surge Protection	Type 1&2/1500Vdc with auxiliary control
Isolator	400A/1500V DC with auxiliary control
Monitoring	Full string monitoring: RS485 to FO
DC/DC Converter	1500V DC/24V DC
Busbars	BS2814C102 HC Copper, Current rating up to 515A
Data Surge Protection	Type 3
String Entry	PV connectors
Mains Exit	Compression glands, vent plugs
Certificates	Type tested to: 1500V DC, SANS10142-1-2, IEC61439-2



Locally designed and assembled

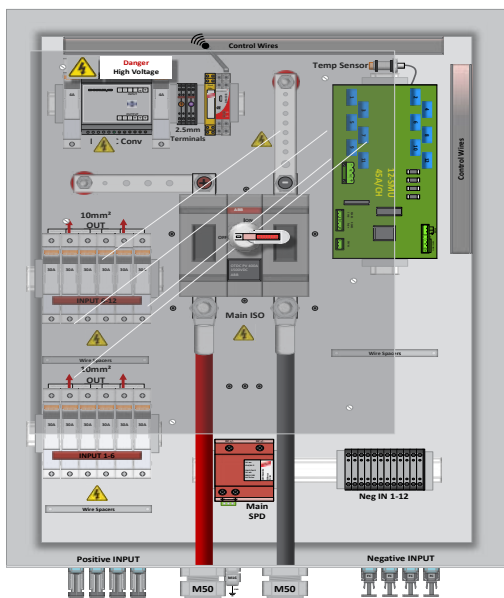

IP66
(Enclosure)




Locally designed and assembled

12-String Combiner Box

- Enclosure Material: GRP
- Enclosure Size: 816x616x323
- Class II Double Insulated
- Flame Retardant
- Self Extinguishing
- Silicon- & Halogen Free
- UV Resistant
- Enclosure standard: IEC 61439-2

Technical Overview

Enclosure	GRP with hinged door – lockable options
Fuse Holder	45A/1500V DC
Fuses	20A/1500V DC
Main Surge Protection	Type 1&2/1500V DC with auxiliary control
Isolator	400A/1500V DC with auxiliary control
Monitoring	RS485 – Wireless
DC/DC Converter	1500V DC/24V DC
Busbars	BS2814C102 HC Copper, Current rating up to 515A
Data Surge Protection	Type 3
String Entry	PV Connectors, Dust Plugs
Mains Exit	Compression glands, vent plugs
Certificates	Type tested to: 1500V DC, SANS10142-1-2, IEC61439-2

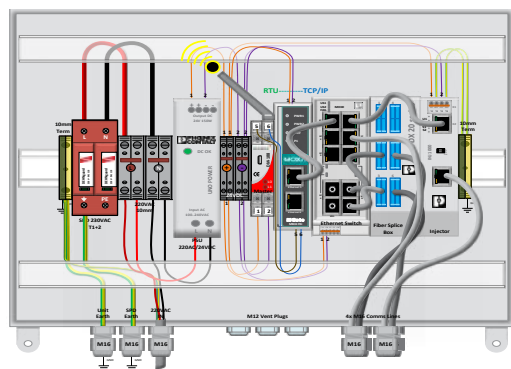

IP66
(Enclosure)



Locally designed and assembled

Wireless Master Receiver

- Enclosure Material: PC
- Enclosure Size: 300x400x187
- IP rating: IP66
- Class II Double Insulated
- Flame Retardant
- Self Extinguishing
- Silicon- & Halogen Free
- UV Resistant
- PSU – 220VAC/24VDC
- SPD – 230VAC, T1+2
- Enclosure standard: IEC 61439-2

Technical Overview

Enclosure	GRP with hinged door – lockable options
Fuse Holder	45A/1500V DC
Fuses	20A/1500V DC
Main Surge Protection	Type 1&2/230V AC with auxiliary control
Isolator	400A/1500V DC with auxiliary control
Monitoring	RS485 – Wireless
DC/DC Converter	1500V DC/24V DC
Busbars	BS2814C102 HC Copper, Current rating up to 515A
Data Surge Protection	Type 3
String Entry	PV Connectors, Dust Plugs
Mains Exit	Compression glands, vent plugs
Certificates	Type tested to: 1500V DC, SANS10142-1-2, IEC61439-2



Fuse Holders 1000V and 1500V

1000V- HTPVFUSEH1000V

- DIN rail mounted (35mm)
- Single pole

Technical Overview

DC Voltage (V)	1000V
Current (A)	32A
Short-Circuit Current (SCCR)	100Ka

RoHS ✓



IP20

Model Specification

Fuse Holder Type	Cylindrical fuse links- 10x38 gPV fuse
Certificates	IEC60269-1&2, UL4248/19, CSA Certified, RoHS

1500V - HTPVFUSEH1500V

- DIN rail mounted (35mm)
- Single pole

Technical Overview

DC Voltage (V)	1500V
Current (A)	32A
Temperature (°C)	-40 to +125°C

RoHS ✓



IP20

Model Specification

Fuse Holder Type	Cylindrical fuse links- 10x38 gPV fuse
Certificates	IEC60269-2, UL4248/19, CSA Certified C22.2 No 4248.19



Fuse Links

1000V DC

Technical Overview

Type	Fuse	Voltage (V)	Current (A)
HTPVFUSE2A1000V	2A	1000	2A
HTPVFUSE15A1000V	15A	1000	15A
HTPVFUSE20A1000V	20A	1000	20A
HTPVFUSE25A1000V	25A	1000	25A
HTPVFUSE30A1000V	30A	1000	30A

Model Specification

Certificates	IEC60269-6, UL2579, RoHS, CSA Certified
Dimensions (mm)	10x38 gPV fuse

RoHS ✓

1500V DC

- Overcurrent protection

Technical Overview

Type	Fuse	Voltage (V)	Current (A)
HTPVFUSE4A1500V	4A	1500	4A
HTPVFUSE15A1500V	15A	1500	15A
HTPVFUSE20A1500V	20A	1500	20A
HTPVFUSE25A1500V	25A	1500	25A
HTPVFUSE30A1500V	30A	1500	30A

Model Specification

Certificates	IEC60269-6, UL2579, RoHS, CSA Pending
Dimensions (mm)	10/14 x 85 gPV fuse

IP20





Cable Ties - UV and Weather Resistant


T-Series, PA66W (black)

- Operating temperature -40°C to +85°C
- Flammability UL94 V2
- High tensile strength with very low insertion force
- Inside serrated cable ties for a strong hold onto bundles
- Easily installed either by hand or with a tensioning tool

HF ✓ RoHS ✓



Locally Manufactured



Type	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Qty	Article-No.
T18RWBK	2.5	100	22	80	PA66W	Black (BK) ■	100	111-02187
T30RWBK	3.5	150	35	135	PA66W	Black (BK) ■	100	111-02188
T50RWBK	4.6	200	35	135	PA66W	Black (BK) ■	100	111-02191
T50IWBK	4.6	305	85	225	PA66W	Black (BK) ■	100	111-02194
T50LWBK	4.6	390	110	225	PA66W	Black (BK) ■	100	111-02195
T120RWBK	7.6	390	105	535	PA66W	Black (BK) ■	50	111-02193
LK5WBK	13.2	535	150	1 115	PA66W	Black (BK) ■	50	111-02192

Recommended Tools

Type	MK10TEN	EV07i
Page	9	9




Cable Ties with Ball-Lock

MBT-Series (SS316)

- Non-releasable locking feature
- Operating temperature -80°C to +538°C
- Corrosion and weather resistant
- Outstanding chemical resistance
- Anti-magnetic
- Non-burning

HF ✓ RoHS ✓ LFH ✓



Type	Width (W)	Length (L)	Bundle Ø max.	N	Material	Article-No.
MBT5S	4.6	127	25	670	SS316	911-01947
MBT8S	4.6	201	50	670	SS316	911-01948
MBT14S	4.6	362	102	670	SS316	911-01950
MBT20S	4.6	521	152	670	SS316	911-01952
MBT8H	7.9	201	50.8	1115	SS316	911-01949
MBT14H	7.9	362	102	1115	SS316	911-01951
MBT20H	7.9	521	152	1115	SS316	911-01953
MBT27H	7.9	681	203	1115	SS316	911-01954

Recommended Tools

Type	HT338	MK9SST
Page	9	9

Cable Ties and Fixings

Edge Clips




2-Piece Fixing Ties for Edges, 1-3mm, Top Fixing

EdgeClip (Black)

- Pre-assembled 2-Piece fixing tie with EdgeClip
- Cable tie head can be moved after bundling
- For edges of 1-3mm
- Harsh environments
- Available in black only

RoHS ✓



Fixing Tie with EC4

Type	Drawing	Width (W)	Length (L)	Bundle Ø max.	N	Material Cable Tie	Material Foot Part	Article-No.
T50ROSEC4A-W		4.6	200	45	225	PA66W	PA66W	156-00570

All dimensions in mm. Subject to technical changes.

Recommended Tools

Type	MK10TEN	EV07i
Page	9	9




Heavy Duty Metal Edge Clips

MSC2

- Integrated design allows for easy insertion by hand
- Panel thickness range allows for multiple applications
- Double-compression design accommodates various wire and cable sizes
- High extraction force withstands extreme conditions
- Operating temperature -80°C to +538°C

RoHS ✓

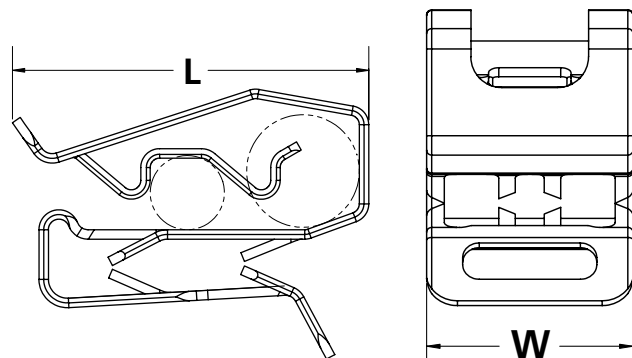

Type	No of Cables	Max Cable (mm)	Min Cable (mm)	Panel Thickness (mm)	Length (L) (mm)	Width (W) (mm)	Material
HTPV2CC	2	7.6	5	1-3	24	13	SS304
PV2CC90	2	7.6	5	1-3	18.6	11.3	SS304
PV2CC6MM	2	6.0	5	1-3	20.3	10	SS304
PV4CC6MM	4	6.0	5	1-3	33.7	10	SS304

All dimensions in mm. Subject to technical changes.







Series 6 Ratchet P-Clamp Solar Hanger

Size B: Series 6 RPC Hanger for Bundle Diameters 12.7 - 19.5mm (Black)

- Temperature -40°C to +105°C
- Impact modified, heat and UV stabilized PA66 provides long-term durability in solar applications
- One-piece ratchet closure design allows for easy installation by hand during pre- or final assembly on First Solar Modules
- Integrated release feature allows for quick adjustments and maintenance
- First Solar specific steel mounting hanger tolerates high torque and is chemical resistant
- Non-destructive easy release with a flat-head screwdriver, allows clamp to be reused, adjusted without removing it
- Adjustable clamp can be closed by hand to desired diameter, replacing multiple sizes of fixed diameter fasteners
- Flammability UL 94 HB
- Material: Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV), Zinc plated (ZN)

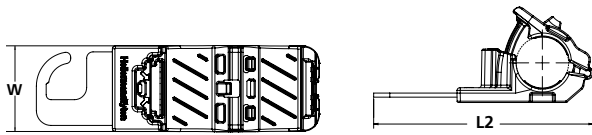

RoHS ✓

Type	Min. Bundle Diameter (mm)	Max. Bundle Diameter (mm)	Length (L2) (mm)	Width (W) (mm)		Mounting Hole Ø (FH) (mm)	Qty	Article-No.
RCBHANGER	12.7	19.5	81.7	34.9	445.0	5.6	280	151-02875


Dimensions are approximate and subject to technical changes.




Series 6 Ratchet P-Clamp Solar Hanger

Size C: Series 6 RPC Hanger for Bundle Diameters 19.4 - 36.0mm (Black)

- Temperature -40°C to +105°C
- Impact modified, heat and UV stabilized PA66 provides long-term durability in solar applications
- One-piece ratchet closure design allows for easy installation by hand during pre- or final assembly on First Solar Modules
- Integrated release feature allows for quick adjustments and maintenance
- First Solar specific steel mounting hanger tolerates high torque and is chemical resistant
- Non-destructive easy release with a flat-head screwdriver, allows clamp to be reused, adjusted without removing it
- Adjustable clamp can be closed by hand to desired diameter, replacing multiple sizes of fixed diameter fasteners
- Flammability UL 94 HB
- Material: Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV), Zinc plated (ZN)

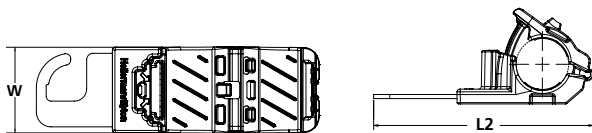

RoHS ✓

Type	Min. Bundle Diameter (mm)	Max. Bundle Diameter (mm)	Length (L2) (mm)	Width (W) (mm)		Mounting Hole Ø (FH) (mm)	Qty	Article-No.
RCCHANGER	19.4	36.0	101.7	34.9	445.0	5.6	160	151-03057


Dimensions are approximate and subject to technical changes.

Cable Ties and Fixings

Cable Tie Tensioning Tools and Patented Product

Nylon Cable Ties (Steel Frame)

MK10TEN

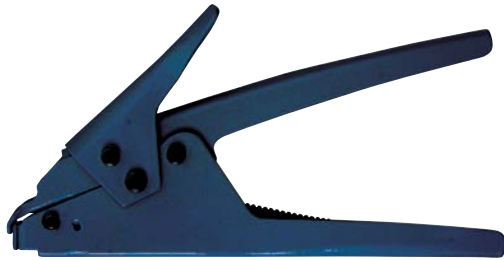

- Adjusting tensioning force
- Lightweight tool ideal for continuous use in high volume production
- **T18, T50** and **T120** series cable ties
- Maximum width of tie: 9.5mm
- Dimensions (mm): 190(L) x 95(H) x 30(W)
- Weight: 500g



Nylon cable tie tensioned and cut i.e. no sharp edges

Nylon Cable Ties (Plastic Frame)

EVO7i



- Adjustable preset tension tool
- Tensions and automatically cuts cable ties up to 4.8mm wide
- Extremely low maintenance
- Housing made of resilient and lightweight glass fibre-reinforced polyester MIL approved
- Dimensions: (mm): 191(L) x 33(W)
- Weight (g): 781



Nylon cable tie tensioned and cut i.e. no sharp edges

Stainless Steel Cable Ties (Plastic Frame)

HT338



- Fastens and automatically cut ties with adjustable bundling pressure
- Tension adjusting indicator
- Cable tie thickness up to 0.3mm. Width up to 7.9mm
- **MBT8, MBT14, MBT20** and **MBT27** cable ties



Stainless steel cable tie tensioned and cut i.e. no sharp edges

Stainless Steel Cable Ties (Plastic Frame)

MK9SST



- Lightweight tool ideal for continuous use in high volume production
- MBT series cable ties
- Maximum width: 4.6 - 16mm
- Dimensions (mm): 190(L) x 150(H) x 40(W)
- Weight: 600g
- Spare blades: **HT338BLD, HT385RAT, SPMK9SST**



Stainless steel cable tie tensioned and cut i.e. no sharp edges




3-D



Rail Cradle for Cable Ties

T50RUNICLIP

- Clip around solid side to each lip of unistrut
- Built in cable tie mount
- Cable tie can be inserted multi directional
- Cable to run along unistrut
- Based on TY self-adhesive cable tie mount design
- Cable ties sold separately



Technical Overview

Material	PA66W
Properties	Weather stable
Dimensions (mm)	42(L) x 42(W) (inside clip/outside of rail)
Unistrut	P1000 and P2000
Cable tie	T50



Patented and locally manufactured



Thermal Transfer Printer

TT431, Small to Medium Print Volumes

- Standard applications e.g. barcodes (2D), warning symbols, graphics and alphanumeric characters
- Thermal Transfer material:
 - TIPTAG cable markets
 - Shrinkable markers
 - Labels
- Colour touch display with clear menu tree structure
- Windows compatible
- TTRC ink ribbon recommended

Technical Overview

Article-No. (Order Code)	556-00400
Print Method	Thermal transfer
Print Resolution (dpi)	300
Max Print Speed (mm/s)	150
Max Print Width (mm)	105.7
Interface	3x USB ports – all support 500mA
Storage	RAM up to 256MB Flash 50MB
Software	TagPrint Pro 4.0 (sold separately)
Dimensions (mm)	243(W) x 189(H) x 322(L)
Weight (kg)	4




Colour touch screen with menu based on smartphone functionality



Identification Tags for Cable Bundle, Thermal Transfer

TIPTAG PU – UV-stabilised


- Operating temperature -65°C to +120°C, intermittent temperature +150°C
- Flammability self-extinguishing, UL 94 V0 (3mm)
- Suitable for retrofit purposes
- Durable and robust polyurethane material
- For large cable bundles and wires
- Harsh environments
- Weather and abrasion resistant
- Good resistance to chemicals
- Perforated format with fastening slots for cable ties
- TTRC ink ribbon recommended



RoHS ✓



Durable ribbon developed to create a "tattoo" effect to prevent marking from being rubbed off








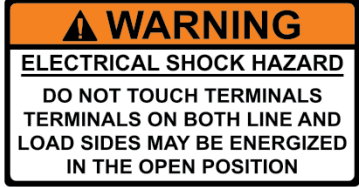



Type	Length (L)	Width (W)	Material	Colour	Qty	Article-No.
TTAGPU11X65WH	65	11	PUR DS	White (WT) <input type="checkbox"/>	190	556-25012
TTAGPU11X65YE	65	11	PUR DS	Yellow (YL) <input checked="" type="checkbox"/>	190	556-25019
TTAGPU15X65WH	65	15	PUR DS	White (WT) <input type="checkbox"/>	190	556-25007
TTAGPU15X65YE	65	15	PUR DS	Yellow (YL) <input checked="" type="checkbox"/>	190	556-25011
TTAGPU11X100WH	100	11	PUR DS	White (WT) <input type="checkbox"/>	125	556-25021
TTAGPU11X100YE	100	11	PUR DS	Yellow (YL) <input checked="" type="checkbox"/>	125	556-25020
TTAGPU15X100WH	100	15	PUR DS	White (WT) <input type="checkbox"/>	125	556-25006
TTAGPU15X100YE	100	15	PUR DS	Yellow (YL) <input checked="" type="checkbox"/>	125	556-25010

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available. More colours on request.

PV Solar Labels

- Warn personnel about risks associated with equipment and operation
- Identify PV products
- Pre-printed labels made with UV stable ink and materials

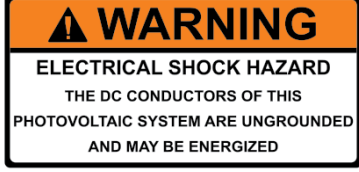Code	Description	Length (L)	Width (W)	Label
SOLAR206	String Combiner Box	25.4	165.1	
SOLAR237	AC Disconnect	25.4	95.25	
SOLAR238	DC Disconnect	25.4	95.25	
SOLAR243	Main DB	44.4	139.7	
SOLAR244	AC Panel	25.4	165.1	
SOLAR497	DC Disconnect / Main Service Disconnect /Breaker Panel	50.8	95.25	
SOLAR498	Inverter / AC Panel	50.8	104.6	
SOLAR587	AC Panel	19.05	104.6	
SOLAR588	Inverter	50.8	104.6	


All dimensions in mm. Subject to technical changes.

Solar Label Value Pack

Solar Label Value Pack Part No.: SOLAR946 (596-03945)

- Assortment of the labels required for NEC 2020 code compliance
- All labels made from UV stable vinyl and dye-based inks and protected by weather-resistant laminate
- Long-lasting, permanent adhesive ensures high-performance results on a variety of metals, paints and man-made materials

Size: 6" x 4" • Qty: 1

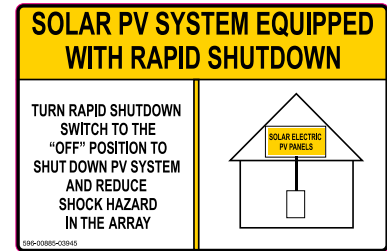

Size: 5.5" x 1.75" • Qty: 1



Size: 5" x 1" • Qty: 1



Size: 6.5" x 1" • Qty: 6



Size: 6.5" x 1" • Qty: 1



Size: 6.5" x 1" • Qty: 6



Size: 6.5" x 1" • Qty: 1



Size: 4" x 1" • Qty: 1



Size: 4" x 1" • Qty: 1



Size: 4" x 1" • Qty: 2



Size: 4" x 1" • Qty: 1



Size: 3.75" x 1" • Qty: 2



Size: 3.75" x 1" • Qty: 2



Size: 3.75" x 1" • Qty: 1




Size: 3.75" x 1" • Qty: 1



Size: 4" x 2" • Qty: 1




Size: 4" x 2" • Qty: 1



Size: 4" x 2" • Qty: 1




Size: 4" x 2" • Qty: 1




Size: 3.75" x 2" • Qty: 1



Size: 3.75" x 2" • Qty: 2



Size: 3.75" x 2.5" • Qty: 1



Size: 2" x 1.25" • Qty: 1



Size: 4.125" x 0.75" • Qty: 2



Size: 4.125" x 0.75" • Qty: 1



Size: 4" x 1" • Qty: 1



Size: 4" x 1" • Qty: 1




Size: 4" x 1" • Qty: 1



Size: 6.5" x 1" • Qty: 1



Size: 3.75" x 5" • Qty: 1

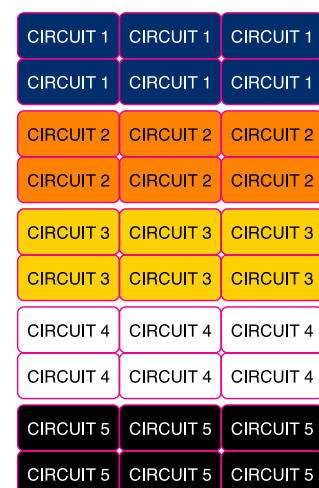



Convoluted Tubing

Medium Duty (High Impact), PVC (Grey)

- Operating temperature -5°C to 60°C
- Compression force 740N
- High impact, flexible, UV stable
- Durable, crush resistant
- Meets requirements of SABS IEC 60614-1:1994 and IEC 60614-2-3:1990 – Pliable conduits for electrical installations
- Authorisations Committee approval number 0211064 **RoHS** ✓

Type	Nominal Size (mm)		Material	Colour	Length (m)	Article-No.
	IØ	OØ				
V20HT3905	15.5	20	PVC	Grey (GY) ■	50	911-01831
V25HT3905	20.5	25	PVC	Grey (GY) ■	50	911-01841

All dimensions in mm. Subject to technical changes.



PV Cables

- Temperature range: -40°C to +90°C
- Extreme weather conditions
- DC Voltage: 1500V
- AC Voltage: 1000V
- Resistant Properties: UV, water and oil
- Flammability: Flame retardant **HF** ✓

Type	Cable Size (mm)	Length (m)	Colour
HTPV CAB4BK100	4	100	Black (BK) ■
HTPV CAB4RD100	4	100	Red (RD) ■
HTPV CAB4BK500	4	500	Black (BK) ■
HTPV CAB4RD500	4	500	Red (RD) ■
HTPV CAB6BK100	6	100	Black (BK) ■
HTPV CAB6RD100	6	100	Red (RD) ■
HTPV CAB6BK500	6	500	Black (BK) ■
HTPV CAB6RD500	6	500	Red (RD) ■
HTPV CAB10BK100	10	100	Black (BK) ■
HTPV CAB10RD100	10	100	Red (RD) ■
HTPV CAB10BK500	10	500	Black (BK) ■
HTPV CAB10RD500	10	500	Red (RD) ■

PV Connectors

- Connects modules into series string
- From DC home-run to inverter
- DC Voltage (V): Up to 1000V
- Current (A): 20A - 30A
- Temperature: -40°C to +85°C
- Protection Class: II



IP68

PV Connector

Type	Description	Dimensions	Connector Material	Contact Material
PVC46F	Female	4 - 6	PPO	Silver plated copper
PVC46M	Male	4 - 6	PPO	Silver plated copper



PV Branch Connector

Type	Description	Dimensions	Connector Material	Contact Material
PVBC2F1M	2F-1M	4 - 6	PPO	Silver plated copper
PVBC1F2M	2M-1F	4 - 6	PPO	Silver plated copper



PV Connector Pin

Type	Description	Dimensions	Connector Material	Contact Material
PVP46F	Female	4 - 6	PPO	Silver plated copper
PVP46M	Male	4 - 6	PPO	Silver plated copper

All dimensions in mm. Subject to technical changes.



Dust Covers

- Prevents possible damage of male or female pin due to:
 - Dust and water ingress
 - Connections causing hot connection
- Compatible with most PV Connectors
- Suitable for:
 - PV panel mount connectors
 - PV cable connectors
 - PV branch connectors

Product Overview

Type	Description	Colour
DCOVERF100	Female Dust Cover	Black (BK) ■
DCOVERM100	Male Dust Cover	Black (BK) ■



Locally manufactured



Rotary Cone Glands

BWR Range

- All types of SWA cable
- Clamping of armour wire for earth continuity and mechanical retention of cable
- Used indoor and outdoor
- Easy to install (rotary cone)
- Protects armour wire
- Nickel plated brass glands
- SABS 1213 approved, permits available on request

Accessories

- PVC or rubber shrouds (p17)
- Earth tags (p17)

Type	Size	Entry	Bedding Ø max.	Cable Ø max.	Article-No.
BWR0	No 0	20	12.5	14.8	911-01117
BWR1	No 1	20	15.7	18.7	911-01118
BWR2	No 2	25	20.6	24.4	911-01119
BWR3	No 3	32	26.5	30.0	911-01120
BWR4	No 4	40	35.0	39.5	911-01121
BWR5	No 5	50	44.0	49.0	911-01122
BWR6	No 6	63	56.0	62.2	911-01123
BWR7	No 7	75	68.0	74.0	911-01124

All dimensions in mm. Subject to technical changes.



Loose Cone Glands

BWL Range

- All types of SWA cable
- Clamping of armour wire for earth continuity and mechanical retention of cable
- Used indoor and outdoor
- Easy to install (rotary cone)
- Protects armour wire
- Nickel plated brass glands
- SABS 1213 approved, permits available on request

Accessories

- PVC or rubber shrouds (p17)
- Earth tags (p17)

Type	Size	Entry	Bedding Ø max.	Cable Ø max.	Article-No.
BWL0	No 0	20	12.5	14.08	911-01125
BWL1	No 1	20	15.7	18.7	911-01126
BWL2	No 2	25	20.6	24.4	911-01127
BWL3	No 3	32	26.5	30.0	911-01128
BWL4	No 4	40	35.0	39.5	911-01129
BWL5	No 5	50	44.0	49.0	911-01130
BWL6	No 6	63	56.0	62.2	911-01131
BWL7	No 7	75	68.0	74.0	911-01132

All dimensions in mm. Subject to technical changes.

Compression Glands

A2 Range



- Nickel-plated brass glands
- All types of 'unarmoured' cable
- Used indoor and outdoor
- Easy to install
- Displacement seal concept ensures effective seal to the outer sheath
- Novel seal design accommodates wide cable range
- SABS 1213 approved, permits available on request

Type	Size	Entry	Bedding Ø (max.)	Cable Ø (max.)	Article-No.
A200	No 00	20	3	8	911-01142
A20	No 0	20	9	12	911-01143
A21	No 1	20	12	15	911-01144
A22	No 2	25	15	19	911-01145
A23	No 3	32	21	27	911-01146
A24	No 4	40	27	36	911-01147
A25	No 5	50	37	45	911-01148
A26	No 6	63	45	57	911-01149
A27	No 7	75	57	69	911-01150

All dimensions in mm. Subject to technical changes.

Glands

Metric, PVC, Nylon (Black and White)



- Multipurpose application
- Watertight
- Easy to assemble
- Good strain relief
- Wide clamp range
- Multiple interlock facets guarantee equal compression against cable
- Metric thread: 20 x 1.5mm

Type	Size	Clamping Range Ø	Thread Length	Material	Colour
BCS1WT*	No 1	10 to 12.5	13	ABS	White (WT) <input type="checkbox"/>
BS0BK	No 0	8.5 to 10.5	13	ABS	Black (BK) <input checked="" type="checkbox"/>
BS0WT	No 0	10 to 12.5	13	ABS	White (WT) <input type="checkbox"/>
BS1BK	No 1	8.5 to 10.5	13	ABS	Black (BK) <input checked="" type="checkbox"/>
BS1WT	No 1	10 to 12.5	13	ABS	White (WT) <input type="checkbox"/>



All dimensions in mm. Subject to technical changes.

*Nylon glass-filled

Crimping Terminals

HTB Standard Lugs and Ferrules

Gland Accessories

Type	Shroud PV & Rubber	Brass Earthing Tag
		




All glands should only be installed by qualified electricians

HTB Standard Lugs and Ferrules

Approvals:

- Mark scheme permit available on request

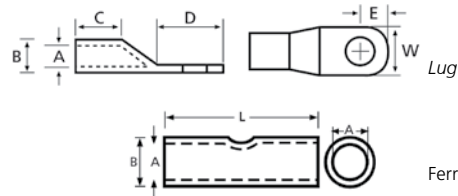

Cable Size (mm ²)	Lug			Ferrule		
	Stud	Barrel: A (IØ)	Spade: W	A (IØ)	B (DØ)	L
1.5	3-6	1.8	8	1.8	3.7	12
2.5	3-8	2.4	8-12	2.4	4	15
4	3-10	3.1	10-14	3.1	4.8	15
6	4-10	3.4	10-15	3.4	5.1	15
10	5-12	4.5	12-19	4.5	6.2	22
16	6-16	6.5	12-24	5.5	7.2	22
25	6-16	6.9	13-24	6.9	8.9	24
35	6-16	8.2	15-24	8.2	10.6	27
50	6-20	10	18-26	10	12.9	30
70	6-20	11.7	21-30	11.7	15.2	34
95	8-20	13.5	25-30	13.5	17.4	38
120	8-20	15.5	28-32	15.5	19.8	42
150	8-20	17	30-32	17	21.7	48
185	10-20	18.5	34-36	18.5	23.5	53
240	10-20	21.5	38-40	21.5	27	60
300	10-20	24.5	43-45	24.5	31	67
400		28.5	50	28.5	36.5	80
500		31.5	56	31.5	40.5	90
630		35	65	35	49	110

Solar Tool Backpack


PVBP

- Suitable for harsh and demanding environments
- Conforms to safety standards
- Backpack water resistant
- Quality tools with lifetime warranty
- Weight: 8kg (Max weight capacity 12kg)
- 1000V insulated tools included



* LIFETIME WARRANTY



Code	Description
AW100	Wrench Adjustable 100mm
CC22	Cable Cutter 25mm ²
H015	Junior Hacksaw, (Blade length 150mm)
HAMB300	Ball Pein Hammer 300g
HT100205	1000V Insulated Combination Plier 205mm
HT104200	1000V Insulated Long Nose Plier 200mm
HT112180	1000V Insulated Diagonal Cutter 180mm
HT20013	1000V Insulated Open-Ended Spanner 13mm
HT21014	1000V Insulated Ring Spanner 14mm
INSSET	8 Piece 1000V Insulated Screwdriver Set with Neon Voltage Tester 
O1604LM	7 Piece Allen Key Set 2.5-10mm
PVCT46	Crimper 2.5 - 6mm ² solar cable
PVST46	Solar Cable Stripper 2.5 - 6mm ²
HYAC5	Crimp Tool Bootlace 0.5 - 6mm ²
HD16L	Crimper 1.5 - 16mm ²
HUK1	Universal Panel Key
SW10	Socket Driver 10mm
TOOLBAGBP	Bag dimensions (mm): 460(L) x 380(W) x 210(D)

Electrical Tool Kit 1000V



PK1000V

- 18 Piece
- Quality tools with lifetime warranty
- High voltage



* Tools only

* LIFETIME WARRANTY

Code	Description
45092	Stripmaster 0.75-6mm ²
AW200	Adjustable Spanner 200mm
CC38	Cable Cutter 38mm ²
HCP200H	1000V Plier 200mm
HDC205H	1000V Diagonal Cutter 200mm
HLN200	1000V Long Nose Plier 200mm
HUK1	Universal Panel Key
INSSET	8 Piece 1000V Insulated Screwdriver Set with Neon Voltage Tester 
LEDTORCH	LED Weatherproof Torch
T235H	TRMS Digital Multimeter – 1999 Counts 
WAK2	Manual Retractable Utility Knife (Blade length 60mm)
PCS	Bag dimensions (mm): 390(L) x 240(W)

Hand Hydraulic Crimper


HYCP400

- Excludes dies

Hand Hydraulic Crimper Kit

HYCP400KT

- Excludes dies

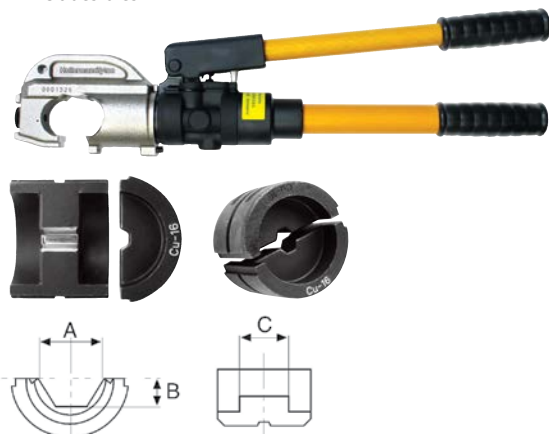

- Automatic low/high - pressure conversion with rapid/slow operating motion
- Pressure relief valve for overload protection
- Head rotates 180°
- Force at die face: 12 metric ton (700 bar)
- C-head opening: 32mm
- Dies sold separately
- Dimensions (mm) 377(L) x 142(W)
- Weight: 6.5kg

Die Code	DIE No.	A	B	C
CP40016D	Cu-16	7.2	3.12	14
CP40025D	Cu-25	8.43	3.67	14
CP40035D	Cu-35	10	4.33	16
CP40050D	Cu-50	11.6	5.02	16
CP40070D	Cu-70	13.7	5.95	15.6
CP40095D	Cu-95	15.9	6.85	15.7
CP400120D	Cu-120	17.98	7.79	16
CP400150D	Cu-150	20.1	8.7	15
CP400185D	Cu-185	22.33	9.67	14
CP400240D	Cu-240	25.43	11.01	13
CP400300D	Cu-300	28.44	12.32	11.2
CP400400D	Cu-400	30	14.55	11.5

Crimping Range

16mm² - 400mm²



Hydraulic Cable Cutter

HYCC85




- Two stage pumping action for rapid blade advance
- Lock pin type cutting head
- Head rotates 180°
- Output: 4.9 tons
- Cuts: Copper strands - 28mm
Aluminium strands - 38mm
Telephone cable CCP - 85mm
Underground cable - 50mm[#]
- Dimensions (mm): 715 (L)
- Weight: 10kg



Copper Cable

PV Stripping Tool

PVST46



- Standard die for 2.5, 4, 6mm² (AWG14, 12, 10) solar PVC cable
- Insulation stripping distance guide
- Automatic spring release action
- Non-slip grip

Parameter	Metric	AWG
Die range	25, 4, 6	14, 12, 10

* All heads require a hydraulic pump
Except armoured cable

Crimper: PV (Solar)

PVCT46



- Adjustable crimping pressure
- MC4 Solar connectors / Solar PV cable
- Right angle head design - Prevents wrist bending
- Pull force on crimping pins - 45kg

Crimping Range	
Metric	AWG
2.5mm ²	10mm ²
4mm ²	12mm ²
6mm ²	14mm ²



Accessories

Code	Description
PVCT46DIE	Replacement Die

Crimper: PV (Solar)

PVCT46B



- Standard die for 2.5/4/6mm² (AWG14/12/10) solar PV cable
- Designed for Bizlink connectors

Crimping Range	
Metric	AWG
2.5mm ²	10mm ²
4mm ²	12mm ²
6mm ²	14mm ²






MAINTENANCE AND EFFICIENCY OF THE PHOTOVOLTAIC SYSTEM	SOLARIV	IV500	PVISOTEST	PVCHECK
PAGE NO.	23	24	25	26
Continuity of protective conductors with 200mA			•	•
Insulation measurement with test voltage 250, 500, 1000V DC with no service interruption			x +1500V DC	•
I-V Curve measurement on single module or string	•			
VOC and ISC measurement on single module or string	•			•
Single- and 3-Phase efficiency measurement	1MPPT			
DC side efficiency of the photovoltaic field				•
Use of remote unit SOLAR02 with USB \ RF connection	RF	USB		RF
Measurement of irradiation with reference cell	•	•		•
Temperature of cell and environment	•	•		•
POWER QUALITY ANALYSIS				
AC/DC voltage in single-/3-phase systems		•	•	DC
AC/DC current in single-/3-phase systems			•	DC
Cosphi, Power Factor				
Voltage unbalance (NEG%, ZERO%)				
Power/Energy: Active P, Reactive Q, Apparent S	Only active P			Only active P
Voltage and current harmonics up to the 49 th with THD%				
Voltage anomalies (dips, peaks) with 10ms resolution (at 50Hz)				
Voltage fast transients (spikes) with 5µs resolution (200kHz)				
Electric motor starting current (INRUSH)				
Voltage flickers (Pst, Plt)				
Phase sequence				
Neutral-Ground Voltage				
Neutral current				
MEMORY AND RECORDING				
Internal memory capacity	249 curves I-V 8 days@ PI =10min	249 curves I-V	999	999 Locations
Recording with selectable integration period	5s-60min			5s-60min
Indicative memory duration(in days at PI=10min at max number of parameters)	8			
Indication of recording duration for power quality analysis				•
Internal memory extension with compact flash card				•
Default and custom recordings				
REAL-TIME DISPLAY				
Summary table of main electric parameters	•	•	•	•
Voltage/current waveforms				
Tables or histograms of Harmonics and THD%				
Voltage/current vector diagram				
Polarization Index (PI)			•	
Dielectric Absorption Ratio			•	
Ground fault location			•	



ADDITIONAL CHARACTERISTICS	SOLARIV	IV500	PVISOTEST	PVCHECK
Measuring range of I-V Curve / IVCK	1500V/10A 1000V/15A	1500V/10A 1000V/15A		1000V/15A only VOC and ISC
Measuring range for efficiency measurement	1000V DC/ 265V AC		1000V AC-DC 3000A	
Touchscreen colour display			•	
LCD display with backlight	•	•		•
USB port for data download onto Pen Drive			•	
PC interface with software for Windows	•	•	•	•
Integrated WiFi interface	•	•		
Custom management of internal PV module database	•	•		•
Power supply: Rechargeable battery, charger			•	
Indication of recording duration for efficiency measurement	•		•	
On display help	•	•	•	•
Safety category	CAT III 300	CAT III 300	CAT III 1500 DC	CAT III 300
Reference standard for safety	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1	IEC/EN61010-1
Reference standard for Power Quality Analysis			EN50160	
Dimensions (mm) LxWxH	235x165x75	235x165x75	235x165x75	235x165x75
Weight (batteries included) kg	1.2	1.2	1	1.2

Solutions for Performance Optimization and Troubleshooting

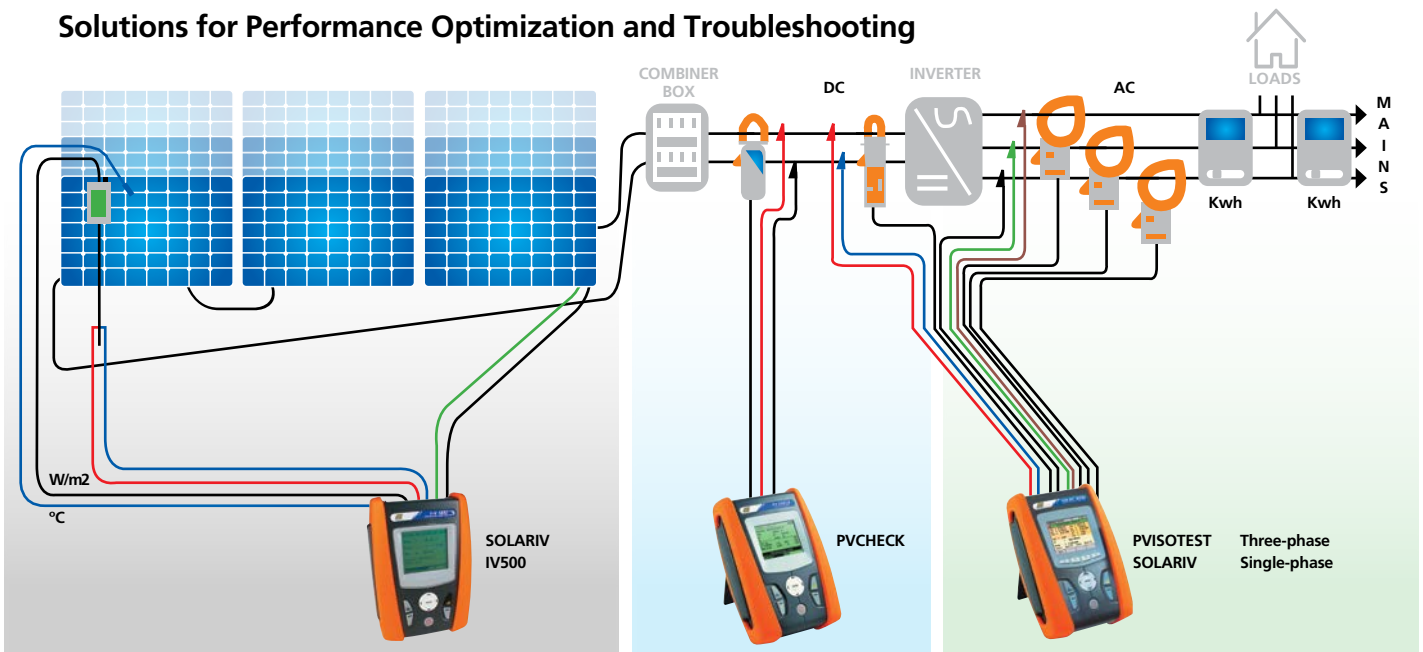

Troubleshooting

Possibly during the operation of a system, some modules may jeopardise the performance of the whole system. When system efficiency is lower than expected, it is necessary to detect the defective modules so that they can be replaced.

Suggested solution: Measure the I-V curve with devices IV500 (p24) or SOLARIV (p23) (DC voltage up to 1500V).

Commissioning Tests

When operating a photovoltaic system, it is necessary to certify its safety according to IEC62446.

Suggested solution: PVCHECK (p26) is recommended to perform these verifications.

Performance

For effective maintenance programmes, Performance Recording and monitoring is necessary to identify losses quickly and efficiently.

Suggested solution: PVISOTEST (p25) or SOLARIV (p23) are ideal for recording utilisation over time as well as performance checks of an inverter.



ACCESSORY		Description	SOLARIV	IV500	PVISOTEST	PVCHECK
PAGE NO.			23	24	25	26
TOPVIEW2006		PC Windows software + USB/ optical cable (C2006) for TOPVIEW2006	TOPVIEW2006	TOPVIEW2006	TOPVIEW2006	TOPVIEW2006
TOPVIEW2007		(C2007) for TOPVIEW2007				
PT300N		PT1000 probe for PV module temperature	•			○
SOLAR02		Irradiation and Temperature Remote unit	•	○		○
KITGSC4		4 Cables, 4 Crocodile clips	•	•	•	•
TKIT800		5 Cables, 5 Crocodile clips				
KITPVMC3 - KITPCMC3		2 Adapters with connectors MC3	KITPVMC3	KITPVMC3		KITPCMC3
KITPVMC4 - KITPCMC4		2 Adapters with connectors MC4	KITPVMC4	KITPVMC4	KITPCMC4	KITPVMC4
A0055		AC/DC Battery charger 230V 50/60Hz				
PT400		Touch-screen pen				
HT304N		Irradiation measurement sensor	•	•		○
M304		Mechanical inclinometer	•	•		○
HT4004N		Standard 10-100A DC clamp, diameter 32mm	•			
HT4005K		Standard 200A AC clamp, diameter 40mm	•			
C2007		TYPE A/B 1.5m USB cable				
C2006		USB cable with optional adapter	•	•		•
HT97U		Standard 10-100-1000A AC clamp, diameter 54mm	○			
HTFLEX33E		Flex 3000A AC clamp, diameter 174mm				
HP30D1		1000A DC clamp, diameter 83mm	○			
HP30C3		3000A AC clamp, diameter 70mm	○			
HP30C2		200-2000A AC clamp, diameter 70mm	○			
606IECN		Magnetic connectors for voltage measurement	○	○	○	○
BORSA2051		Soft carrying bag				•
VA500		Rigid carrying case	•	•		
KITKELVIN		Test lead kit	○	○		

○ Optional



CAT II \leq 1000V DC

CAT III \leq 300V AC to ground (Max 1500V among inputs P1, P2, C1, c2)



TOPVIEW2006



SOLAR02



KITGSC4



HT4005K

Model Specification

Power Source	6x1.5V AA Alkaline Batteries
Standard Accessories Selection Guide	<p>SOLAR02 - Irradiation and Temperature Remote</p> <p>KITGSC4 - 4 x Cables & 4 x Crocodile Clips</p> <p>KITPVMC3 - 2 x Adapters with Connectors MC3</p> <p>KITPVMC4 - 2 x Adapters with Connectors MC4</p> <p>HT4005K - Standard 200A AC clamp, diameter 40mm</p> <p>HT4004N - Standard 10-100A DC Clamp, Diameter 32mm</p> <p>HT304N - Sensor for Irradiation Measurement</p> <p>PT300N - PT1000 Probe for PV Modules Temperature</p> <p>M304 - Mechanical inclinometer</p> <p>TOPVIEW2006 - Windows Software & Optical/USB C2006 Cable</p> <p>VA500 - Rigid Case</p>
Certificates	IEC/EN61010-1, Calibration Certificate

I-V CURVE TRACER UP 1500V DC

SOLARIV

- Measurement of PV module/string output voltage, 1500V
- Measurement of PV module/string output current, 15A
- Resolution (spots) of I-V curve in Standard or Capacitive mode, 128
- Measurement of Voc-Isc-Pmax-Vmpp-Imp-FFill Factor
- Measurement of cell temperature through external feeler
- Measurement of irradiation [W/m²] through reference cell
- Measurement of DC and rated power at module/string output
- Detection of I-V curve through remote unit SOLAR-02
- Measurement of resistance of series Rs of panels
- Direct comparison with reference conditions (STC - 1000W/m², 25°C)
- Internal database for managing up to 30 PV modules (30.000 modules by software)
- DC/AC TRMS single-phase voltage
- DC/AC TRMS single-phase current
- Single-phase DC power / AC active power
- Solar irradiation [W/m²] with reference cell HT304N
- Panel and environmental temperature through probes
- Remote unit SOLAR02 with RF connection
- Display of environmental data in real time
- Use of compensation relationships Cells/ Environment on Pdc
- Parameter recording of a PV system with 5s to 60min programmable IP
- Max/Min


Technical Overview

Certifier of Single Phase PV Installation


Feature	Parameter	Accuracy
DC Voltage (V)	15 – 1500V	±0.5% + 2 Digit
AC TRMS Voltage (V)	10 – 265V	±0.5% + 2 Digit
DC Current (External Transducer Clamp(mV))	-1100 - 1100mV	±0.5% + 0.6mV
AC TRMS Current (External Transducer Clamp (mV))	1 – 1200mV	±0.5% + 0.6mV
DC Power (1<FS≤1000)	0 – 9999kA	±0.7% + 3 Digit (I _{meas} <10%FS)
AC Single Phase (1<FS≤100)	0 – 9999kA	±0.7% +3 Digit (I _{meas} < 10%FS)
Frequency (Hz)	47.5 – 63Hz	0.2% + 1.0Hz
Irradiance (Reference Cell)	1 – 65mV	±1.0% + 5 Digit
Temperature (External Probe PT1000)	-20 to +100°C	±1.0% +1°C

I-V Curve and IVCK Measurements

Feature	Parameter	Accuracy
I-V, IVCK: VDC Voltage @ OPC	15 – 1499.9V	±0.5% + 2 Digit
I-V, IVCK: IDC Current @ OPC	10 – 15A	±1.0% + 2 Digit
I-V: DC Power @ OPC (Vm_{pp} >30V, I_{m_{pp}} >2A)	50 – 99 999W	±1.0% + 6 Digit
I-V, IVCK: VDC Voltage (@ STC)	5 – 999.9V	±4.0% + 2 Digit
I-V: IDC Current (@ STC)	10 – 99A	±4.0% + 2 Digit
I-V: DC Power @ STC (Vm_{pp} >30V, I_{m_{pp}} >2A)	50 – 99 999W	±5.0% + 1 Digit

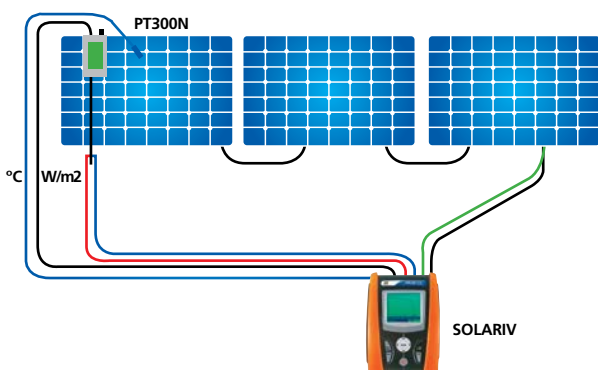

Measuring of curve IV with environmental sensors

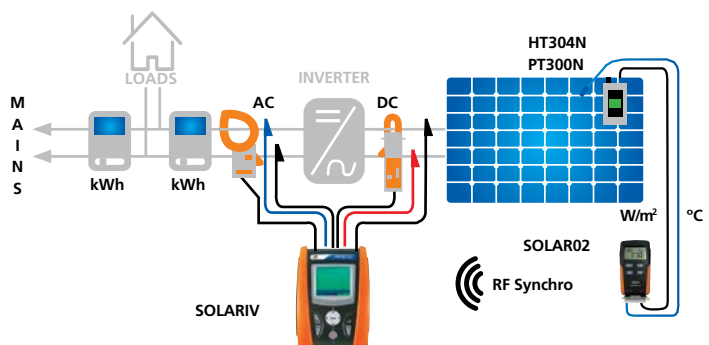

Measuring single-phase efficiency with remote environmental sensors



CAT II 1000V DC

CAT III 300V AC to ground (Max 1500V among inputs P1, P2, C1, c2)

I-V Curve Tracer and Tester up to 1500V DC

IV500

- Measurement of PV module/string output voltage, 1500V
- Measurement of PV module/string output current, 15A
- Resolution (spots) of I-V curve in Standard or Capacitive mode, 128
- Measurement of Voc-Isc-Pmax-Vmpp-Imp-PP-Fill Factor
- Measurement of cell temperature through external feeler
- Measurement of irradiation [W/m²] through reference cell
- Measurement of DC and rated power at module/string output
- Detection of I-V curve through remote unit SOLAR-02
- Measurement of resistance of series Rs of panels
- Direct comparison with reference conditions (STC - 1000W/m², 25°C)
- Internal database for managing up to 30 PV modules (30.000 modules by software)
- DC/AC TRMS single-phase voltage
- DC/AC TRMS single-phase current
- Single-phase DC power / AC active power
- Solar irradiation [W/m²] with reference cell HT304N
- Panel and environmental temperature through probes
- Remote unit SOLAR02 with RF connection
- Display of environmental data in real time
- Use of compensation relationships Cells/ Environment on Pdc

Technical Overview

Feature	Parameter	Accuracy
I-V, IVCK: VDC Voltage @ OPC	15 – 1499.9V	±0.5% + 2 Digit
I-V, IVCK: IDC Current @ OPC	10 – 15A	±1.0% + 2 Digit
I-V: DC Power @ OPC (Vmpp >30V, Impp >2A)	50 – 99 999W	±1.0% + 6 Digit
I-V, IVCK: VDC Voltage (@ STC)	5 – 999.9V	±4.0% + 2 Digit
I-V: IDC Current (@ STC)	0.1 – 99A	±4.0% + 2 Digit
I-V: DC Power @ STC (Vmpp >30V, Impp >2A)	50 – 99 999W	±5.0% + 1 Digit
Irradiance (Reference Cell)	1 – 100mV	±1.0% + 5 Digit
Temperature (Auxiliary PT1000 probe)	-20 to +100°C	±1.0% + 1°C

Model Specification

Power Source	6x1.5V AA Alkaline Batteries
Standard Accessories Selection Guide	<p>KITGSC4 - 4 x Cables & 4 x Crocodile Clips</p> <p>KITPVMC3 - 2 x Adapters with Connectors MC3</p> <p>KITPVMC4 - 2 x Adapters with Connectors MC4</p> <p>HT304N - Sensor for Irradiation Measurement</p> <p>M304 - Mechanical inclinometer</p> <p>TOPVIEW2006 - Windows Software & Optical/USB C2006 Cable</p> <p>VA500 - Rigid Case</p>
Certificates	IP40, IEC/EN61010-1, Calibration Certificate



TOPVIEW2006



KITPVMC3



KITPVMC4




M304




HT304N



VA500

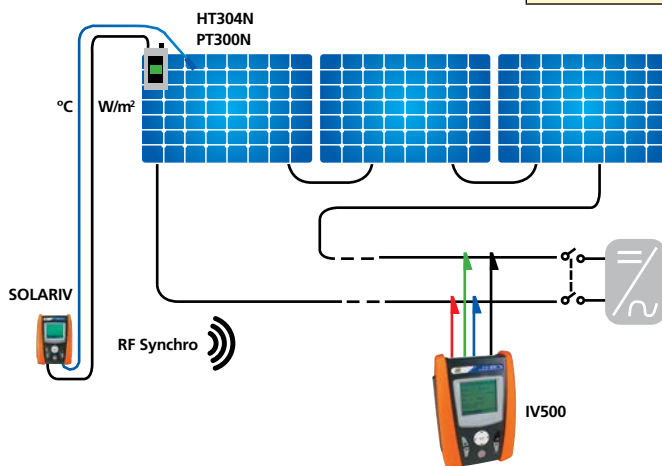

* Measuring a IV curve via remote synchronisation of irradiation and temperature

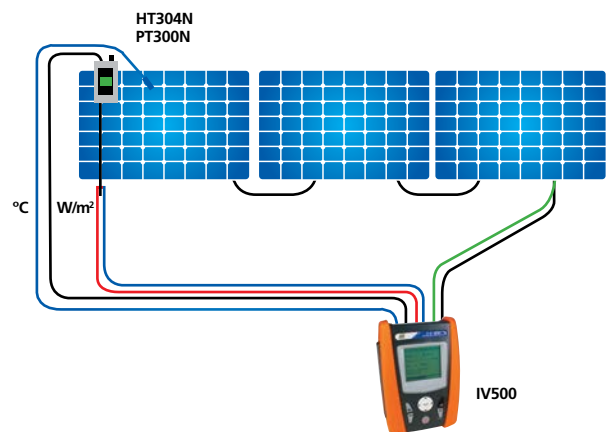

Measuring of curve IV with environmental sensors



IP40

CAT III 1000V (AC)

CAT III 1500V (DC)



KITGSC4



KITPCMC4



VA507



SP-5100



TOPVIEW2006

PV Insulation Tester

PVISOTEST

Multifunction device for checking electric safety and performance of a photovoltaic system.

Features


- Insulation measurement up to 1 500V DC even on live systems
- Ground Fault Locator function for localization of the faulty module
- Continuity of the protective conductor with 200mA
- Dielectric absorption ratio D.A.R
- Measurement of polarization index P.I.
- Backlit Display 128 x 128 pixels
- Optical/USB interface

Technical Overview


Feature	Parameter	Resolution	Accuracy
DC Voltage (V)	3 - 1500V	1	±1.0% +2 Digit
AC Voltage (V)	3 - 1000V	1	±1.0% +3 Digit
Insulation Test Voltage (V)	250V/ 500V/ 1000V/ 1500V		
Insulation Resistance (MΩ)	0.01 - 9.99MΩ	0.01	±5.0% +5 Digit
	10 - 99.9MΩ	0.1	
Continuity of protection conductors (RPE)	0.00 - 9.99Ω	0.01	±2.0% +2 Digit
	10 - 99.9Ω	0.1	
	100 - 1999Ω	1	
Ground Fault Locator (GFL) function	0.1 - 0.99MΩ	0.01	±5.0% +5 Digit (±1 module)
	1.0 - 19.9MΩ	0.1	
	20 - 100MΩ	1	
Working Humidity	<80%RH		
Working Temperature	0°C to 40°C		
Memory	999 tests MAX		
Display	128 x 128 pixel with backlight		

Model Specification


Power Source	6 x 1.5V AA Batteries
Dimensions (mm)	235(L) x 165(W) x 75(H)
Weight (g)	1200 (including batteries)
Standard Accessories Selection Guide	KITGSC4 - 4 x Cables & 4 x Crocodile Clips KITPCMC4 - 2 x MC4 banana adapters VA507 - Hard carrying case SP-5100 - Carrying straps TOPVIEW2006 - Windows Software & Optical/USB C2006 Cable, user manual on CD-ROM
Certificates	IEC/EN61010-1, IEC/EN61010-2-030, IEC/EN61010-2-033, IEC/EN61010-2-034

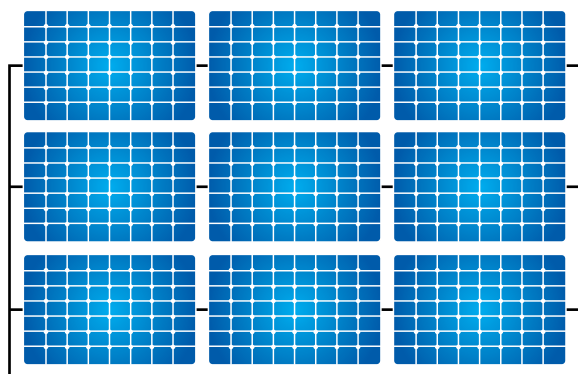

Insulation mode DUAL
Unearthed PV field



RPE FUNCTION
Connection diagram

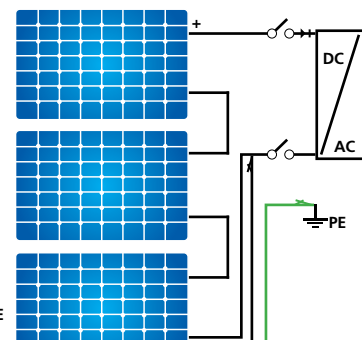

Insulation mode TIMER
Connection diagram



PVCHECK PRO

CAT III 300V to ground (Max 1000V DC among inputs P, N, E, C)



TOPVIEW2006



BORSA2051



KITGSC4



KITPVMC3



KITPVMC4



HT4004

PVCHECKPRO



PT300N




SOLAR02



HT304N



VA500

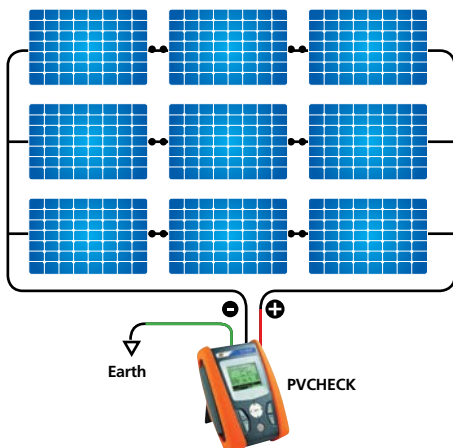

"Whole photovoltaic field" insulation measurement method

Multifunction Device for Commissioning Tests

PVCHECK/ PVCHECKPRO

- Continuity of protective conductors with test current 200mA
- Insulation measurement with test voltage 250, 500 and 1000VDC
- Open-circuit voltage (VOC) measurement up to 1000V DC
- Short-circuit current (ISC) measurement up to 15A DC
- DC voltage - DC current - DC power measurement
- Use of compensation relationships Cells/Environment on Pdc
- Internal database for managing up to 30 PV modules (30.000 modules by software)
- Test measurement of string operation
- Result for every measurement OK/NO
- Internal memory and optical USB output for PC connection (256kBytes)
- LCD display, 128x128pxl, with backlight

Technical Overview

Performance Test

Feature	Parameter	Accuracy
DC Voltage (V)	5 – 999.9V	±1.0% + 2 Digit
DC Current (Mean External Clamp (mV))	0 – 1000V	±0.5% + 0.6mV Digit
DC Current (FS DC clamp [A])	1<FS≤1000	0.05 – 5A
DC Power (Vmeas > 150V)	1<FS≤1000	±1.5% +3 Digit (Imeas < 10%FS)

Functionality Test


Feature	Parameter	Accuracy
DC Voltage @ OPC (V)	5 – 999V	±1.0% + 2 Digit
DC Current @ OPC (A)	0.1 – 15A	±1.0% + 2 Digit
DC Voltage @ STC (V)	5 - 999	±4.0% + 2 Digit
DC Current @ STC (A)	0.1 – 15A	±4.0% + 2 Digit
Irradiance (Mean HT304N) (mV)	1 – 40mV	±1.0% + 0.1mV
Temperature (Mean PT300N) (°C)	-20 to +100°C	±1.0% + 1°C

Safety Test

Feature	Parameter	Accuracy
Continuity Test (LOWΩ)	0 – 199Ω	±2.0% + 2 Digit
Insulation Test (MΩ) – Mode TIMER	25/ 500/ 1000V	0.01 – 199MΩ ±5.0% + 5 Digit

Model Specification

Power Source	6x1.5V AA Alkaline Batteries
Standard Accessories Selection Guide	KITGSC4 - 4 x Cables & 4 Crocodile Clips KITPCMC3 - 2 x Adapters with MC3 Connectors KITPCMC4 - 2 x Adapters with MC4 Connectors HT4004 - Standard 10-100A DC clamp, diameter 30mm TOPVIEW2006 - Windows Software & USB C2007 Cable BORSA2051 - Soft Carrying Bag
Optional Accessories Selection Guide	PT300N - PT1000 Probe for PV Modules Temperature SOLAR02 - Irradiance and Temperature Remote HT304N - Sensor for Irradiance Measurement M304 - Mechanical inclinometer
Certificates	IEC/EN61010-1, Calibration Certificate

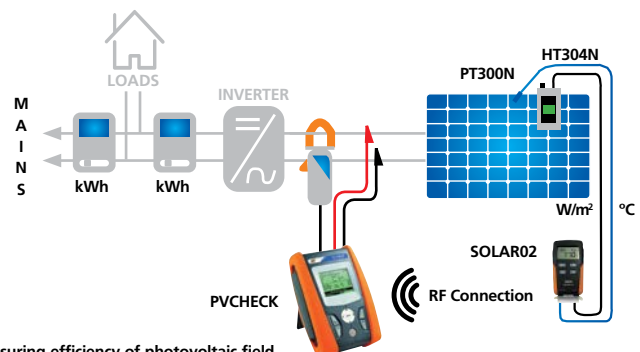

Measuring efficiency of photovoltaic field



IP40

CAT III 1000V
to ground

CAT IV 600V



F3000U AOMCY Test Leads TBMTEMPROBE

Model Specifications

Power Source	1 x 7.2V Li-ION Rechargeable Battery (1200mAh)
Standard Accessories	Test Leads, Micro SD Card (8GB Card) K-Type Temperature Probe (TBMTEMPROBE), Pouch
Optional Accessories	Flexible Clamp (F3000U), 400A Clamp (HT4006)
Certificates	IP40, IEC/EN61010-1, IEC/EN61326-1
Dimensions (mm):	190(L) x 75(W) x 55(H)
Weight (g)	555

AC/DC TRMS Thermal Clamp 1500V DC

ECLIPSE

- Jaw size: 40mm
- Detects AC voltage without contact
- Data logger and graph
- Diode test
- Bluetooth connectivity with HTMercury APP
- Laser pointer
- White LED illuminator

Technical Overview

Feature	Parameter	Accuracy
DC Voltage (V)	600mV/ 6/ 60/ 600/ 1500V	±0.8% + 5 Digit
AC TRMS Voltage (V)	6/ 60/ 600/ 1000V	±2.5% + 5 Digit
AC +DC TRMS Voltage (V)	6/ 60/ 600/ 1000V	±2.5% + 20 Digit
DC Current (A)	60/ 600/ 1000A	±2.0% + 8 Digit
AC TRMS Current (A) INRUSH Current	60/ 600/ 1000A	±2.5% + 5 Digit
AC TRMS Current (A) with Flexible clamp	30/ 300/ 3000A	±3.0% + 5 Digit
Resistance (Ω)	600/ 6kΩ/ 60kΩ/ 600kΩ/ 6MΩ/ 60MΩ	±1.0% + 10 Digit
Frequency (Hz)	40 – 10kHz	±0.09% + 5 Digit
	60/ 600/ 6kHz/ 60kHz/ 600kHz/ 6MHz/ 10MHz	±0.2% + 5 Digit
Temperature (°C) K-Type	-40 to +1000°C	±1.5% + 3°C
Capacitance (F)	60nF/ 600nF/ 6μF/ 60μF/ 600μF/ 6000μF / 60mF/ 100mF	±3.0% + 8 Digit
Colour TFT Display		6 000 Counts

Infrared Temperature

Feature	Parameter	Accuracy
Temperature (°C)	-20 to +260°C	±3°C or ±3% (@ env temp: 10 - 35°C, object temp >0°C)
Thermal sensitivity	<0.1°C @ 30°C / 100mK	
Colour palettes	5 (Iron, Rainbow, Grey, Reverse Grey, Feather)	
Field of View (FOV)	21° x 21° / 7.5mm	
IFOV (@1m)	4.53mrad	
Image frequency	50Hz	
IR Sensor Resolution	80 x 80pxl,	
Emissivity correction	0.01 to 1.00	
Measurement cursors	3 (FIXED, MAX, MIN)	
Focusing	Automatic	

TBM089 - 1000A AC/DC

- Jaw size: 51mm
- 3-Phase rotation for mains and motors
- AmpTip™
- Non-contact EF detection (NCV)
- Rotary selector switch
- Continuity test
- Flashlight

Technical Overview

Feature	Parameter	Accuracy
DC Current (A)	60/ 600/ 1000A	±1.8% + 5 Digit
AC Current (A)	60/ 600/ 1000A	±1.8% + 5 Digit
DC Voltage (V)	600/ 1000V	±1.0% + 5 Digit
AC Voltage (V)	600/ 1000V	±1.2% + 7 Digit
Resistance (Ω)	600/ 6kΩ/ 60kΩ	±1.0% + 5 Digit
Temperature (°C)	-40 to +400°C	±1.0% + 0.8°C
Frequency (Hz)	5Hz - 400kHz	±0.5% + 4 Digit
Capacitance (F)	2500μF	±2.0% + 4 Digit
Display	3^{1/2} Digits	6 000 Counts

Model Specification

Power Source	2 x 1.5V AA Batteries
Standard Accessories	Carry Pouch, Temp Probe TBMTEMPROBE, Test Leads, Crocodile Clips
Certificates	UL, IEC61010-1, Certificate of Conformance



LIFETIME WARRANTY

CAT IV 1000V



CAT III 1500V (DC)

CAT IV 1000V (AC/DC)

Model Specifications

Power Source	2 x 1.5 AA Batteries
Standard Accessories	Test Leads, K-Type Thermocouple TBMTEMPPOBE , Soft Carrying Pouch
Optional Accessories	USB interface kit TBU19X ;
Certificates	IEC/EN/BS/EN/CSA_C22.2_No./UL standards of 61010-1 Ed. 3.1, 61010-2-032 Ed. 4.0, 61010-2-033 Ed. 2.0
Dimensions (mm)	264(L) 97 (W) x 43(H)
Weight (g)	608

Multimeter Clamp PV

TBM198PV

- Jaw size: 55mm
- VFD-V, VFD-Hz (Variable frequency drivers)
- Update rate: 5 per second
- Ghost-Voltage-Buster
- Backlit Dual display
- Non-contact EF detection (NCV)
- Data logging (PC-Comm interface)
- 5mS Crest-Max capture mode
- Auto Ranging Relative-Zero mode

Technical Overview

Feature	Parameter	Accuracy
AC Current (A)	0 – 2000A	±3.5% ± 5 Digit
DC Current (A)	0 – 2000A	±3.0% ± 5 Digit
DC + AC Current (A)	0 – 2000A	±3.5% ± 8 Digit
AC Voltage (V)	6/ 60/ 600/ 1000V	±1.2% ± 5 Digit
DC Voltage (V)	6/ 60/ 600/ 1000V / 1500V	±0.5% ± 5 Digit
AC+DC Voltage (V)	6/ 60/ 600/ 1000V	±1.4% ± 7 Digit
Capacitance (F)	60nF/ 600nF/ 6µF/ 60µF/ 600µF/ 2000µF	±4.0% ± 5 Digit
Resistance (Ω)	600/ 6k/ 60k/ 600k/ 6M/ 40MΩ	±2.3% ± 5 Digit
Diode Tester	1V	1.0% ± 3 Digit
Temperature (°C)	-50°C to +1000°C	±0.3% ± 4 Digit
Input impedance	10MΩ	
Display	3 ¹ / ₂ Digits	6 000Counts (+1999 dual display)

Thermal Multimeter

MERCURY

- Open-circuit string voltage (Voc)
- String operating voltage (Vmpp)
- Current provided by string in operating conditions (Impp) readings do not differ by ≥5% from string to string
- Status of filter capacitors found in inverter (one of the most critical elements)
- Status of locking and by-pass diodes
- Thermographically analyse photovoltaic modules to search for presence of overheated modules or cells

Technical Overview

Feature	Parameter	Accuracy	Overload Protection
AC-DC TRMS Voltage (V)	6, 60, 600, 1 000	±2.4% +20dgt	1 000V DC/AC rms
AC, AC+DC TRMS Current* (A)	1 000m, 10, 40, 100, 400, 1 000A	±2.4% +5dgt	1 000V DC/AC rms
Duty Cycle	5%	±1.2% +2dgt	1 000V DC/AC
Resistance & Continuity (Ω) Buzzer <50Ω	600, 6k, 60k, 600k, 6M, 60MΩ	±2.5% +20dgt	1 000V DC/AC
Capacitance (F)	60n, 600n, 6µ, 60µ, 600µ, 6 000µF	±2.5% +20dgt	1 000V DC/AC
Temperature Type-K (°C)	-40 to +600°C 600 to +1 000°C	±1.5% +3°C	1 000V DC/AC

Model Specifications

Power Source	2x rechargeable Li-ION batteries.
Standard Accessories	Test Leads, K-Type Temperature Probe (TBMTEMPPOBE), Micro SD Card (8GB), Flexible Clamp (F300U), Pouch
Optional Accessories	AC Clamp (HT97U)
Certificates:	IEC/EN61010-1, EMC: IEC/EN 61326-1
Dimensions (mm)	185 (L) x 75(W) x 55(H)
Weight (g)	55 (including batteries)



IP65

CAT III 1000V

CAT IV 600V



F3000U

AOMCY

Test Leads

TBMTEMPPOBE

Infrared Temperature

Feature	Parameter	Accuracy
IR Sensor Resolution (pxl)	80x80pxl (34µm)	
Spectrum Range	8-14µm	
IFOV (@1m)	4.53mrad	
Thermal Sensitivity	0.1°C @ 30°C/ 100mK	
Min Focusing Distance (m)	0.5m	
Temperature (°C)	-20 to +260°C	±3% +3°C
Colour Palettes	4 (Iron, Rainbow, Grey, Grey Inverted)	


Your Partner of Choice

From concept to completion, we have the perfect solution to suit your needs and environment conditions.

Critical to operational stability is selecting products with the right UV and weather resistant material, as well as tools and instruments to keep maintenance costs to the minimum.

Understanding your needs to ensure fit for purpose solutions whether it is green fields, balance of plant or individual products, we are your partner of choice for cable management and distribution. Based on customer requirements, we offer an integrated approach to customised design and assembly of products according to international standards such as IATF, IEC and ISO as well as local requirements.

Investing in engineered renewable energy customised solutions from HellermannTyton can make a huge difference in performance and life of system costs, which greatly enhances your personnel health and safety, bottom line and reputation.

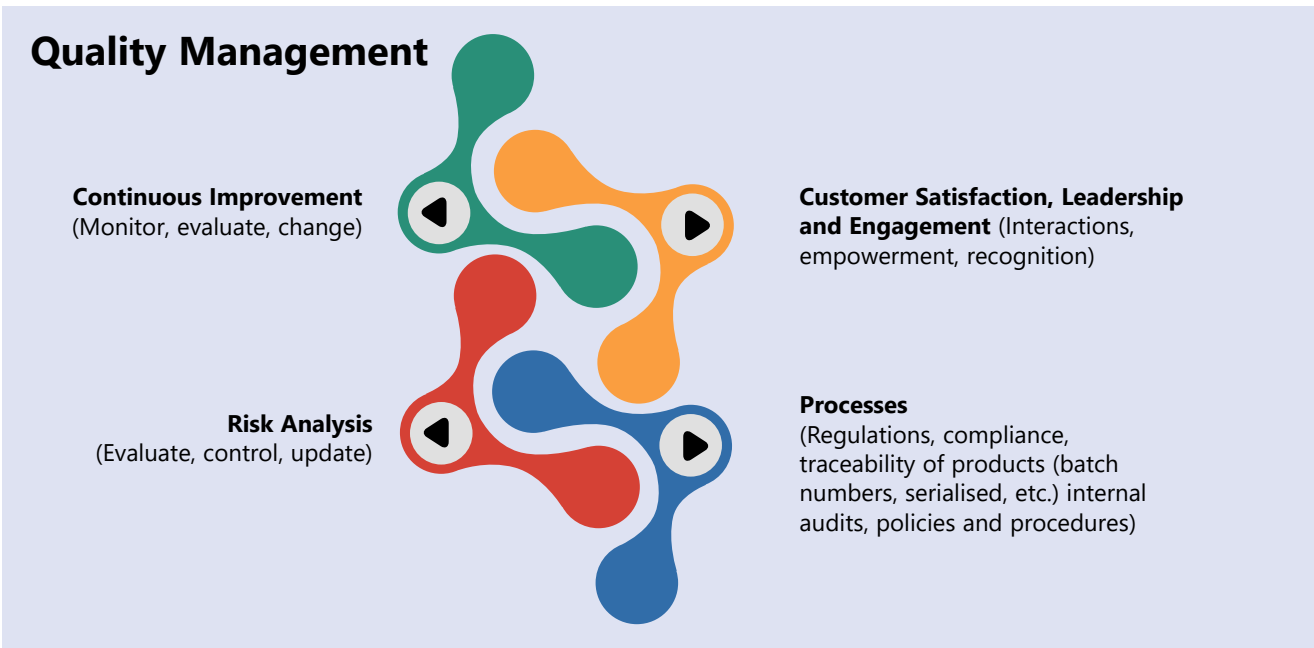

Health and Safety

We are committed to the health and safety of all concerned. All our solutions comply with the Health and Safety ACT (OHSA) to ensure health and safety risks are mitigated.

We encourage the exchange of information between our staff, partners and customers to ensure all health and safety risks are either eliminated or reduced. We are continuously aiming to improve on our performance and encourage our employees to be proactive when it comes to health and safety issues.

Global Network

HellermannTyton is a global manufacturer operating in 39 countries with world-class local manufacturing facilities in South Africa. HellermannTyton is a member of the South African Photovoltaic Industry Association (SAPVIA).



HellermannTyton Solar Cable Ties, Solar E-Clips and Solar Identification solutions have been installed on over 5GW of solar systems around the world. The materials expertise we developed by consulting with Fortune 500 companies like Google, Ford, Tesla, Caterpillar and many others has been applied to cable management solutions that stand up to the environment, reduce risks and lower the total cost of ownership.

Our insight into the renewable energy industry has allowed us to develop 25-year rated Identification solutions that take the ambiguity out of changing labelling requirements.

HellermannTyton



www.shop.hellermann.com

Johannesburg
Tel: (011) 879 6620

Durban
Tel: (031) 492 0481

Cape Town
Tel: (021) 594 7100

Gqeberha (PE)
Tel: (041) 408 2400

Email
sales.jhb@hellermann.com

Website
www.hellermann.com